




Note that all unique customer requirements (i.e tolerance) need to be verified thru Alfa Laval.

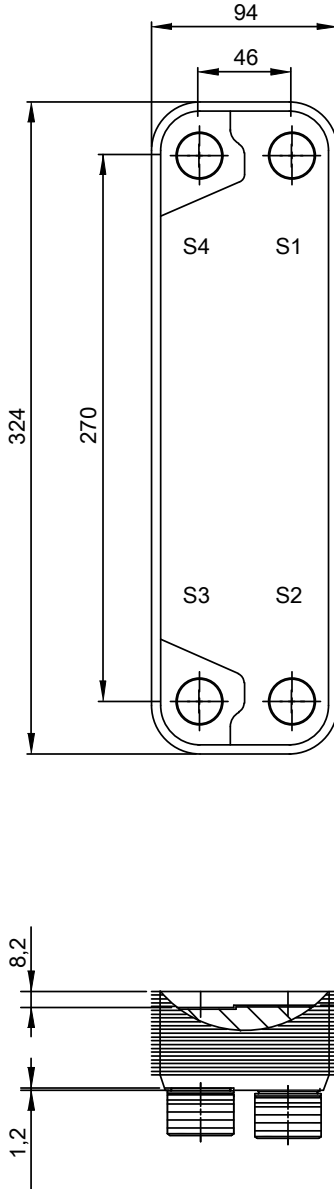

B 21
Alloy 316
S1,S2,S3,S4

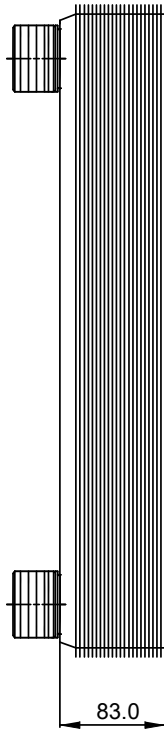

Frameplate is depressed 1.2 mm at connection S3/S4
Pressureplate is depressed 1.2 mm / even number of channel plates at connections T3/T4 / uneven number of channel plates at connections T1/T2.

T1 T2 T3 T4 locations on back side correspond to S1 S2 S3 S4 on front side



HEATING SURFACE
NETWEIGHT 5.15 kg
OPERATING WEIGHT
PLATE MATERIAL Alloy 316
PLATE GROUPING 1*24H/1*25H

ALL DIMENSIONS IN MILLIMETERS

| SIDE | MEDIA | INLET | TEMP. | OUTLET | TEMP. | FLOW RATE | PRESSURE DROP | LIQUID VOL. |
|------|-------|-------|-------|--------|-------|-----------|---------------|----------------------|
| 1 | | | | | | | | 0.67 dm ³ |
| 2 | | | | | | | | 0.7 dm ³ |



PRESSURE VESSEL APPROVAL

PED

CB20AQ-50H (3287167831)

www.alfalaval.com

CUSTOMER NAME / REF. NO.

COMPANY / REF.

TOTAL LENGTH 105.8 mm
TOTAL WIDTH 94.0 mm
TOTAL HEIGHT 324.0 mm

5/12/2017
REV 0